



## Gas pressure regulator GDJ

Product brochure · GB  
2 Edition 08.12

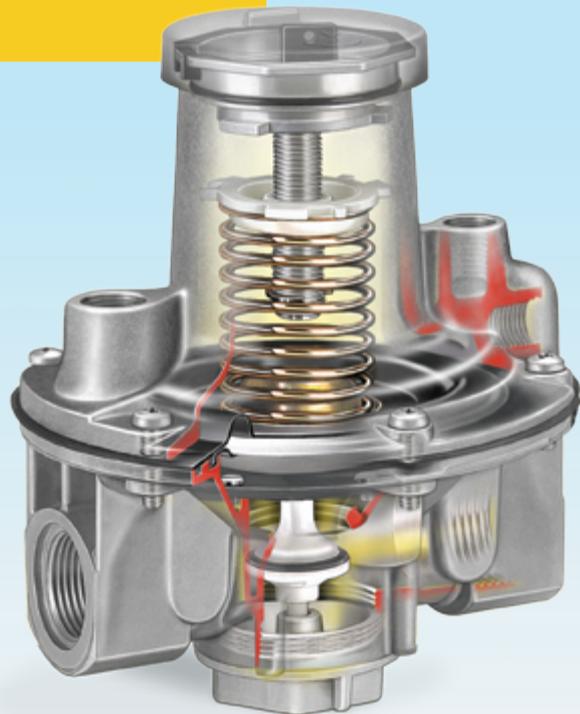

- Universal pressure regulator for gaseous media
- Design with inlet pressure compensation diaphragm ensures high control accuracy
- Internal impulse
- No breather line required
- EC type-tested and certified
- Certified by Gosstandart pursuant to GOST-TR

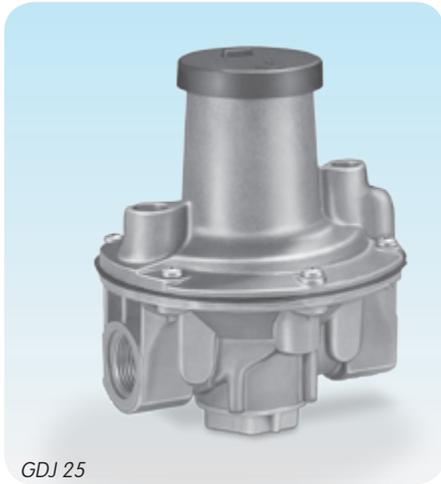

GDJ 25

### Application

The spring-loaded gas pressure regulator GDJ with inlet pressure compensation diaphragm and zero shut-off serves to maintain the set outlet pressure constant despite changing gas flow rates and inlet pressures in gas pipelines. Thanks to an additional safety diaphragm, no breather line is required.


For controlling the pressure of the gas and air supply to gas burners and gas appliances in industry and the heating sector.

### Type code

Code	Description
GDJ	Gas pressure regulator
15, 20, 25, 40, 50	Nominal size
R	Rp internal thread
04	$p_v$ max. 400 mbar
-0	Without pressure test point
-4	Pressure test point at the inlet
L*	For air only (without approval)

\* If "none", this letter is omitted.

### Flow rate

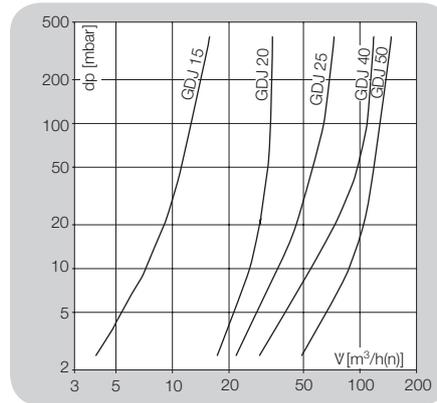

### Technical data

Gas types: natural gas, town gas, LPG (gaseous) and biologically produced methane (max. 0.02 %-by-vol. H<sub>2</sub>S), GDJ..L also for air. The medium must be dry in all temperature conditions and must not contain condensate.

Inlet pressure range up to 400 mbar.

Outlet pressure ranges:

GDJ 15: 2 to 55 mbar,

GDJ 20–40: 5 to 160 mbar,

GDJ 50: 5 to 100 mbar.

Control range: 10:1.

Ambient temperature: -20 to +60°C.

Storage temperature: -20 to +40°C.

Valve housing: aluminium.

Valve seat: aluminium.

Valve disc: plastic.

Valve disc seal: Perbunan.

Diaphragms: Perbunan.

When used for air: special version.


Internal thread: Rp to ISO 7-1. Wartungszyklen

### Maintenance cycles

At least once a year, at least twice a year in the case of biologically produced methane.



Bogie hearth furnace



Roller hearth furnace



Bogie hearth furnace



Detailed information on this product



[http://docuthek.kromschroeder.com/doclib/main.php?language=1&folderid=202020&by\\_class=6](http://docuthek.kromschroeder.com/doclib/main.php?language=1&folderid=202020&by_class=6)

### Contact

[www.kromschroeder.com](http://www.kromschroeder.com) → Sales

Elster GmbH  
Postfach 2809 · 49018 Osnabrück  
Strothweg 1 · 49504 Lotte (Büren)  
Germany

T +49 541 1214-0  
F +49 541 1214-370  
info@kromschroeder.com  
[www.kromschroeder.com](http://www.kromschroeder.com)

We reserve the right to make technical modifications in the interests of progress.  
Copyright © 2012 Elster GmbH  
All rights reserved.